


性能曲线/Performance

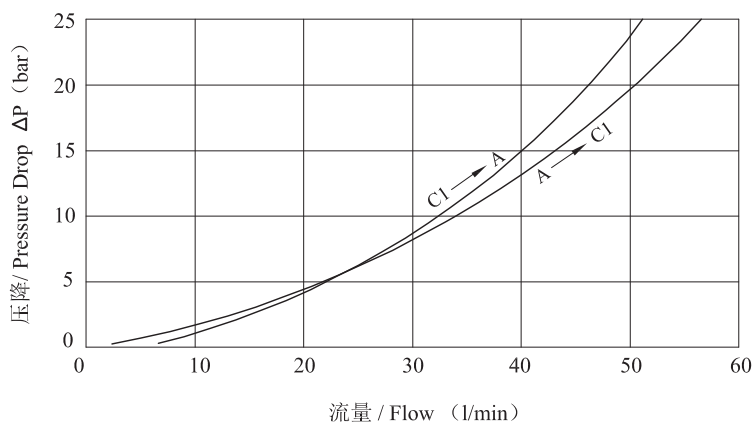

说明/NOTE

测试条件:

油温50°C, 油液黏度16cSt, 环境温度20°C

Test conditions:

Toil: 50°C; Voil:16cSt; Tamb:20°C

代号 Ordering Code	先导比例 Pilot Ratio	压力调节范围 Adjustance Pressure Range (bar)	标准设定 Standard Setting (bar)	压力递进 Pressure Increase (bar)/r	流量范围 Flow Range (l/min)	最大压力 Max. Pressure (bar)	Y	重量 Weight (kg)
04A036101.00	2.7:1	80-350	300	85	5-45	500	G3/8	1.7
04A036102.00	4.3:1	100-350	350	135	5-45	500	G3/8	1.7
04A036103.00	8.8:1	100-350	350	90	5-45	500	G3/8	1.7
04A046101.00	2.7:1	80-350	300	85	10-60	500	G1/2	2.1
04A046102.00	4.3:1	100-350	350	135	10-60	500	G1/2	2.1
04A046103.00	8.8:1	100-350	350	90	10-60	500	G1/2	2.1
04A046101.01	2.7:1	80-350	300	85	10-60	500	M22X1.5	2.1
04A046102.01	4.3:1	100-350	350	135	10-60	500	M22X1.5	2.1
04A046103.01	8.8:1	100-350	350	90	10-60	500	M22X1.5	2.1