



机能符号/Functional Symbol

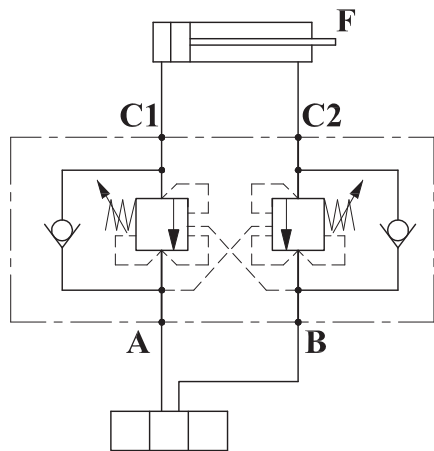

技术参数/Technical Data

- O-function directional valves available
可以使用O型中位机能的换向阀
- Operating temperature: +40°C~+70°C
工作温度: +40°C~+70°C
- Working medium: ISO VG 10 to 68 according to DIN ISO 3448
工作介质: 符合DIN ISO 3448标准, 范围在ISO VG 10-68
- Material: Steel, zinc-plated
阀体材质: 镀锌钢体
- Sealing Material: Nitrile Rubber
密封材质: 丁腈橡胶

主要尺寸/Dimension

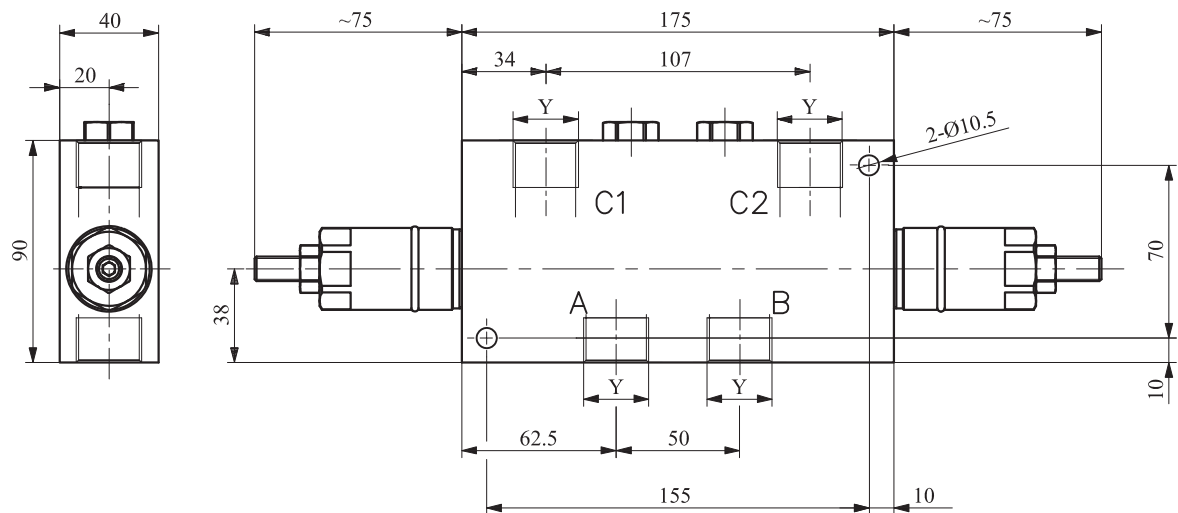

备注: 所有油口尺寸Y均为G3/4

订货代码/Ordering Code

代 号 Ordering Code	先导比例 Pilot Ratio	压力调节范围 Adjustance Pressure Range (bar)	标准设定 Standard Setting (bar)	压力递进 Pressure Increase (bar)/r	流量范围 Flow Range (l/min)	最大压力 Max. Pressure (bar)	Y	重量 Weight (kg)
04A060611.00	4.4:1	100-350	300	90	20-140	500	G3/4	3.6
04A060612.00	8.2:1	100-350	350	90	20-140	500	G3/4	3.6