


性能曲线/Performance

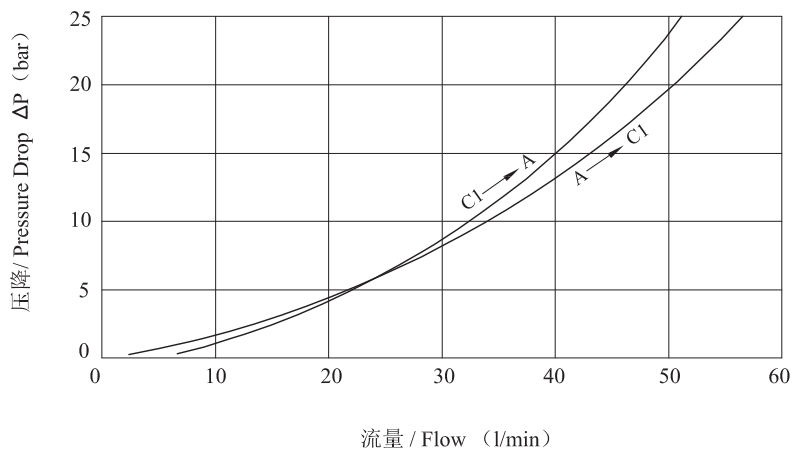

说明/NOTE

测试条件:

油温50℃, 油液黏度16cSt, 环境温度20℃

Test conditions:

 $T_{oil}: 50^{\circ}\text{C}$; $\nu_{oil}: 16\text{cSt}$; $T_{amb}: 20^{\circ}\text{C}$

订货代码/Ordering Code

代号 Ordering Code	先导比例 Pilot Ratio	压力调节范围 Adjustance Pressure Range (bar)	标准设定 Standard Setting (bar)	压力递进 Pressure Increase (bar)/r	流量范围 Flow Range (l/min)	最大压力 Max. Pressure (bar)	Y	重量 Weight (kg)
03A026104.00	2.7:1	80-350	300	85	1-20	500	G1/4	1.45
03A026105.00	4.3:1	100-350	350	135	1-20	500	G1/4	1.45
03A026106.00	8.8:1	100-350	350	90	1-20	500	G1/4	1.45
03A036114.00	2.7:1	80-350	300	85	10-45	500	G3/8	1.4
03A036115.00	4.3:1	100-350	350	135	10-45	500	G3/8	1.4
03A036116.00	8.8:1	100-350	350	90	10-45	500	G3/8	1.4
03A046104.00	2.7:1	80-350	300	85	10-60	500	G1/2	1.6
03A046105.00	4.3:1	100-350	350	135	10-60	500	G1/2	1.6
03A046106.00	8.8:1	100-350	350	90	10-60	500	G1/2	1.6