


产品说明/Functional Symbol

DN4 manual directional valve, a variety of operational functions are available.
It is a spool valve with spring-return and with an optional spool positioning device. Aluminum-free, high pressure up to 350 bar, for a wide range of industries.

四通径手动换向阀，多种工作机能可供选择，阀芯采用滑阀结构，选配弹簧复位和阀芯定位装置，不含铝材，能承受高压，适用于多种行业。

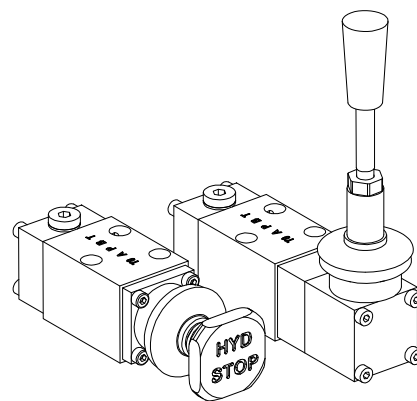


技术参数/Technical Data




- | | | |
|--|--|--|
| <ul style="list-style-type: none"> Operating temperature: -20°C~+70°C
工作温度: -20°C~+70°C Working medium: ISO VG 10 to 68 according to DIN ISO 3448
工作介质: 符合DIN ISO 3448标准, 范围在ISO VG 10 to 68 | <ul style="list-style-type: none"> Material: Steel, zinc-plated
阀体材质: 镀锌钢体 Sealing Material: Nitrile Rubber
密封材质: 丁腈橡胶 | <ul style="list-style-type: none"> Pmax: 350bar
工作压力: 350bar Flow max: 20L/min
流量: 20L/min |
|--|--|--|

主要尺寸/Dimension

1、手柄90° 型 (90° Handle)

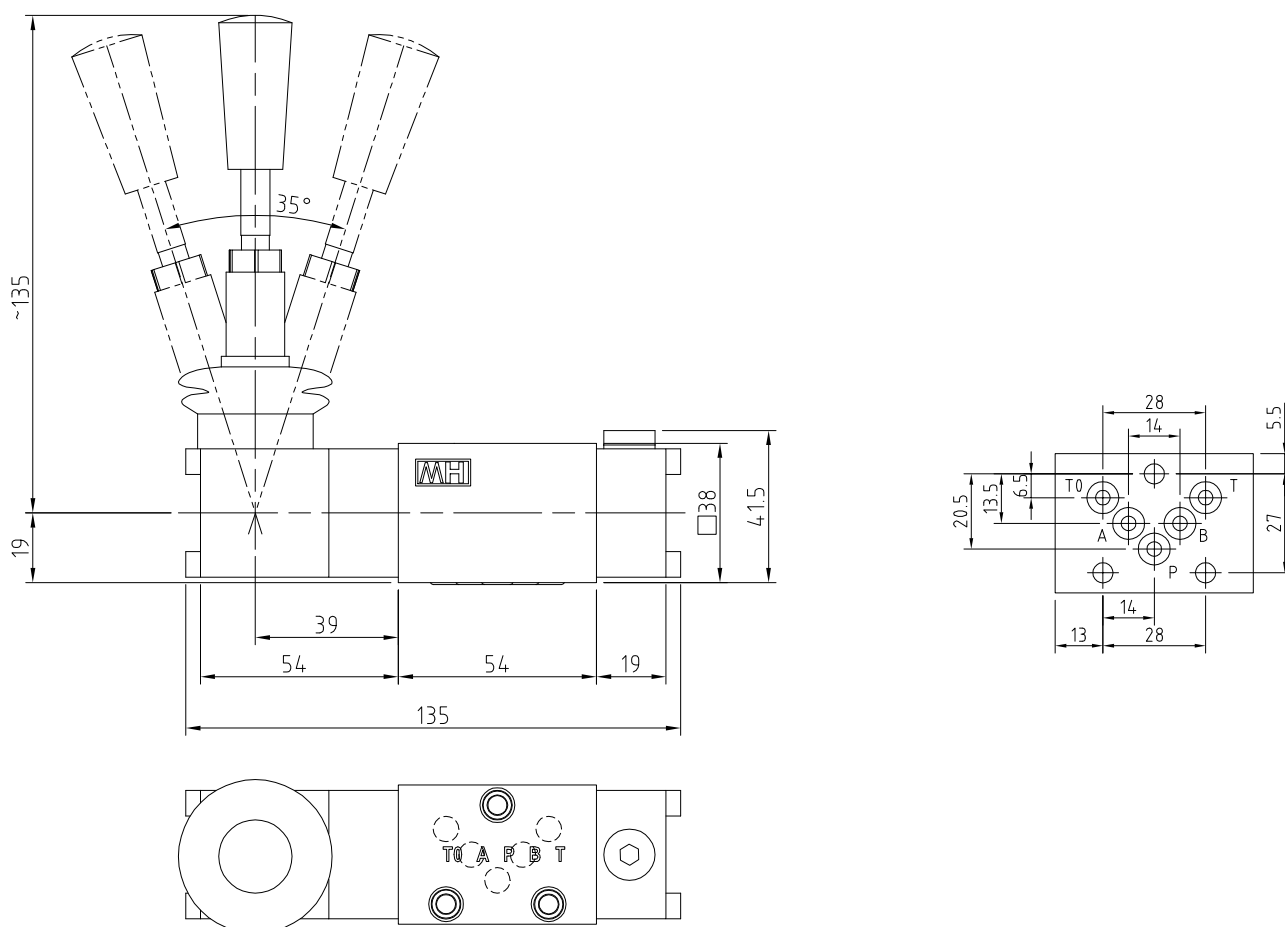

2、手柄0° 型 (90° Handle)

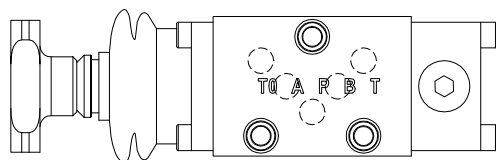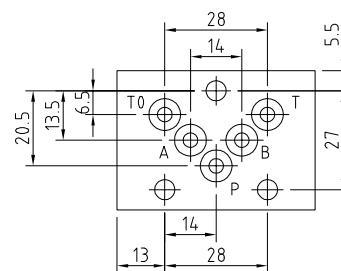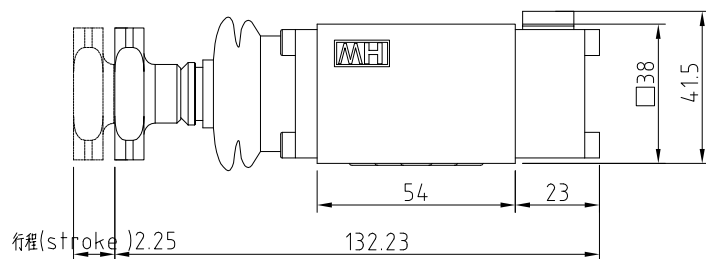



订货代码/Ordering Code

8571 - 1 - 1 - 01 - 1 - 1					
Product Category: DN4 90°Handle	1.Positioning slot 2.Spring-return	1.A-side operation 2.B-side operation	Symbols	Angle of the handle (Viewed from the handle side)	Angle of the Positioning Plug (Viewed from the handle side)
产品类型: DN4 手柄90° 型	1、带定位功能 2、弹簧复位	1、A侧安装手柄 2、B侧安装手柄	换向机能	手柄角度 (从手柄端看)	定位件角度 (从手柄端看)

8572 -	1	-	1	-	01	-	0	-	1
Product Category: DN4 0°Handle	1.Positioning slot 2.Spring-return	1.A-side operation 2.B-side operation	Symbols				Angle of the Positioning Plug (Viewed from the handle side)		
产品类型: DN4 手柄0° 型	1、带定位功能 2、弹簧复位	1、A侧安装手柄 2、B侧安装手柄	换向机能				定位件角度 (从手柄端看)		

手柄角度（从手柄端看）
Angle of the handle (Viewed from the handle side)

定位件角度（从手柄端看）
Angle of the Positioning Plug (Viewed from the handle side)

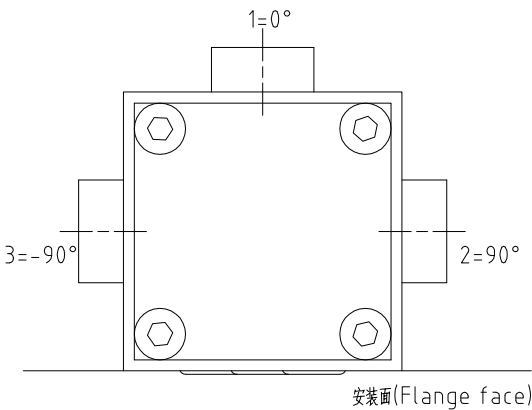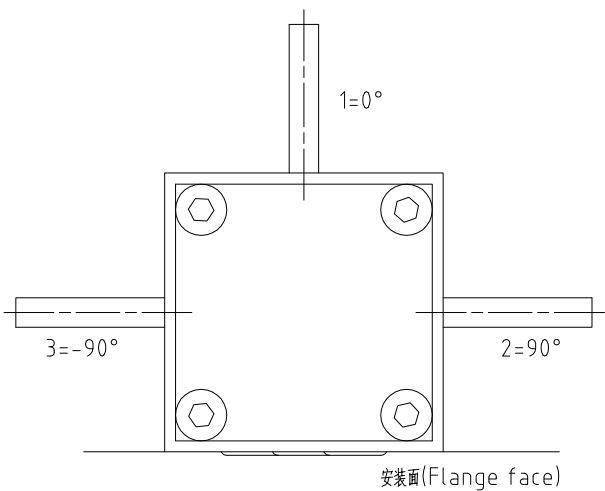

换向机能/Symbols

